

Communicating at a record 14.5 bits per received photon through a photon-starved channel

Sai Kanth Dacha^{1,2,*}, René-Jean Essiambre^{1,*}, Alexei Ashikhmin,¹ Andrea Blanco-Redondo¹, Frank R. Kschischang,³ Konrad Banaszek⁴, and Yuanhang Zhang¹

¹*Nokia Bell Labs, Murray Hill, 600 Mountain Ave, New Providence, New Jersey 07974, USA*

²*Department of Applied Physics and Applied Mathematics, Columbia University, New York, New York 10027, USA*

³*Department of Electrical and Computer Engineering, University of Toronto, Toronto, Ontario, Canada M5S 3G4*

⁴*Centre for Quantum Optical Technologies, University of Warsaw, 02-097 Warszawa, Poland*



(Received 7 April 2025; accepted 16 July 2025; published 1 August 2025)

Exploration of the Universe requires communication with Earth, either on a direct path or through a cascade of proximate celestial bodies. Microwaves have traditionally been used for space communication, but electromagnetic waves of higher frequencies, such as in the optical domain, will enable probing farther in space due to their considerably lower diffraction loss. The ultimate range limit to point-to-point optical communication, at a given transmitter power, is determined by the photon information efficiency (PIE), which measures the number of information bits extracted per photon incident on a detector. As distances across space and, consequently, path loss increases, systems achieving the highest PIE can enable communication at the longest distances. We report here an experimental demonstration of optical detection at a record PIE of 14.5 bits per incident photon, or 17.8 bits per detected photon, after 87.5 dB of attenuation. Expressed in terms of energy per bit, this corresponds to 8.84 zeptojoules per bit, or 0.069 photons per bit at 1550 nm. To our knowledge, this is the highest PIE or lowest energy per bit detection system ever demonstrated at optical frequencies. Such a sensitive detection system holds promise for a wide range of applications.

DOI: [10.1103/mmth-7twv](https://doi.org/10.1103/mmth-7twv)

I. INTRODUCTION

The ability to receive information using the lowest-possible power is a fundamentally important aspect of efficient communication systems. Perhaps the best illustration of this lies in the remarkable sensitivity of rod cells in humans and other animals to the faintest of light, including single photons [1,2], brought about by evolution and natural selection. In the modern technological context, photon-efficient detection is central to several applications, such as covert communication [3], quantum communication protocols such as quantum key distribution [4–6], green networking [7], and transmission of information through high-attenuation channels such as in deep space [8]. Deep space may represent the most extreme high-attenuation channel, in which the power incident on a receiver can be as low as $\lesssim 1$ photon per transmitted symbol, known as the “photon-starved” regime. In such a regime of low-power detection, maximizing the number of bits conveyed by each photon, known as the photon information efficiency (PIE), is of paramount importance.

Traditionally, communication between deep-space probes and receivers near Earth has used electromagnetic waves with carriers in the microwave range, typically ranging from a few gigahertz (X band) to a few tens of gigahertz (Ka band) [9], with coherent detection at the receiver [8]. However, long-distance microwave-based communication suffers from much greater diffraction loss [10] than optical waves [11,12] due to the longer wavelengths involved, as shown in Figs. 1(a) and 1(b). In the far-field approximation, the signal power incident on a receiver is given by

$$P_R(d) = P_T [\pi D_T D_R f_c / (4 c d)]^2, \quad (1)$$

where P_T is the transmit power, f_c the carrier frequency, d the propagation distance, c is the speed of light in vacuum, and D_T and D_R the transmit and receive aperture diameters, respectively. Figure 1(c) shows a comparison of the net power loss for microwave and optical carrier frequencies, for typical transmit and receive apertures. The received power $P_R(d)$ scales with carrier frequency as f_c^2 , whereas the quantum noise power scales as f_c , resulting in a signal-to-noise ratio (SNR) that scales linearly with the carrier frequency. Since optical carriers operate around 200 THz, the potential four orders of magnitude improvement in SNR provides a strong incentive to move from microwaves to optical frequencies for deep-space communication. In addition, operating at optical frequencies allows spatial beam confinement to improve privacy and minimize interference (or jamming), which may be critical for other free-space link applications, as well as

*These authors contributed equally to this work.

Published by the American Physical Society under the terms of the Creative Commons Attribution 4.0 International license. Further distribution of this work must maintain attribution to the author(s) and the published article's title, journal citation, and DOI.

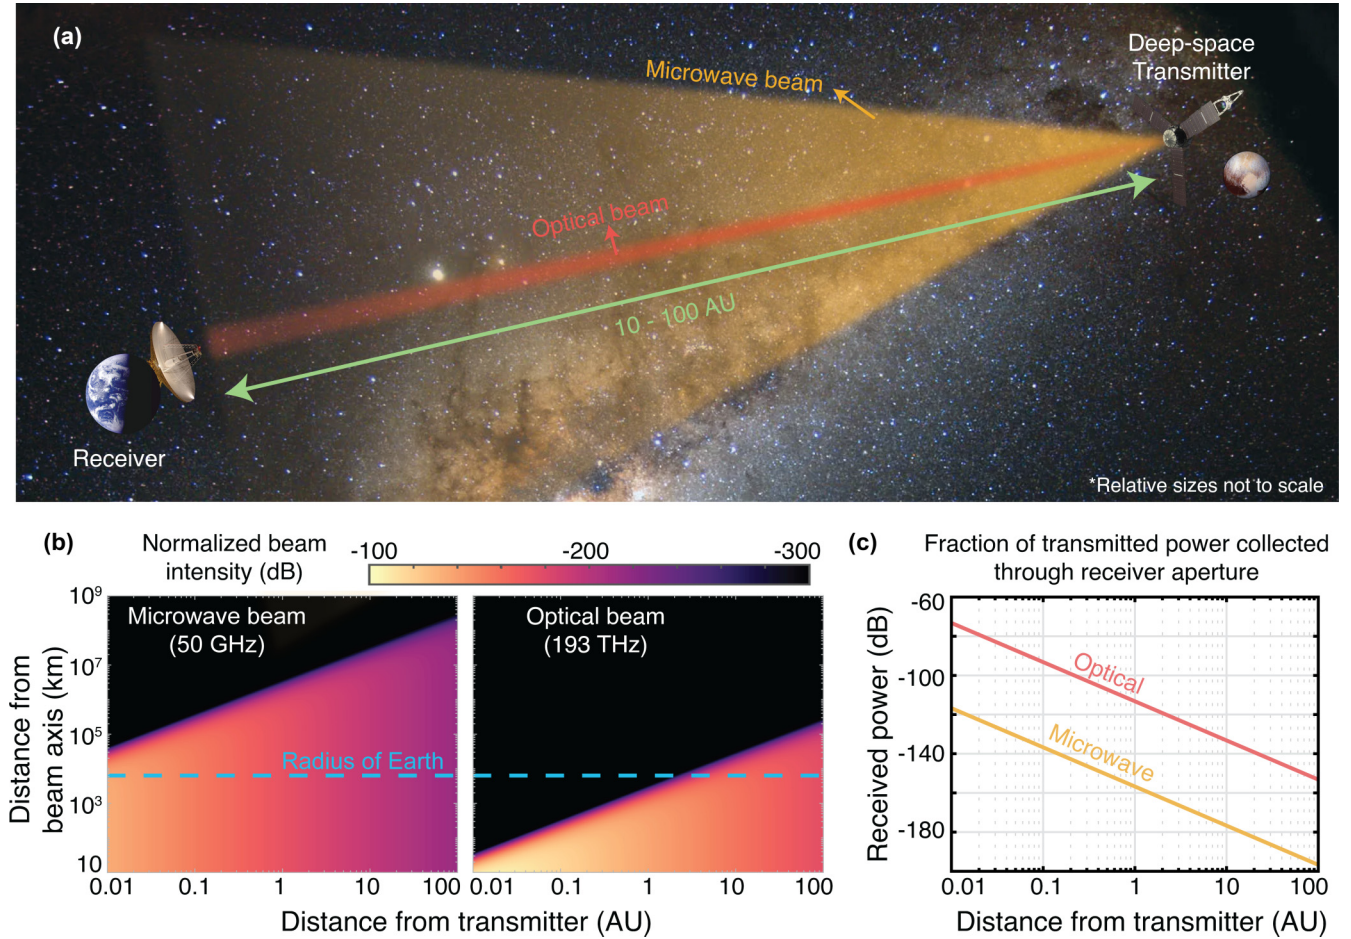


FIG. 1. Comparison of microwave and optical carrier beams for downlink deep-space communication. (a) Illustration depicting a deep-space link connecting a distant spacecraft with an Earth-based receiver. Electromagnetic waves with microwave carrier frequencies experience significantly larger diffraction compared to optical carriers. (b) Colormap, on logarithmic scales, describing the intensity of the microwave (50 GHz) and optical (193 THz) beams, normalized to their respective on-axis maxima at the beam waist. For distances larger than a few astronomical units (A.U.), the transversal extents of the received beams are larger than the radius of Earth (blue dashed line), with the microwave beam being more than three orders of magnitude larger than the optical beam. (c) Received power, calculated for microwave and optical beams, for transmitter and receiver aperture diameters (D_R, D_T) of (3.7 m, 20 m) and (0.2 m, 2.28 m), respectively (images from NASA/ESA).

providing orders of magnitude larger and mostly unregulated bandwidth.

A critical step in the realization of practically viable deep-space optical links is the development and demonstration of technologies that can achieve photon-efficient detection using compact and energy-efficient transmitter and receiver architectures. Systems achieving a large PIE enable communication at the largest attenuation and can therefore bridge the largest distances. The PIE is calculated from the channel capacity C using $\text{PIE} = C/F_s$, where $F_s = P_s/(hf_c)$ is the rate of arrival of signal photons, where P_s is the signal power and hf_c the energy of a single photon. Another related metric is the dimensional information efficiency (DIE), which is a measure of the number of bits transmitted per “mode.” In a deep-space link, the receiver aperture is much smaller than the beam size, favoring using time, i.e., time slots, rather than space, as transmission modes to increase power efficiency. The DIE is calculated as $\text{DIE} = C/R_{\text{slot}}$, where R_{slot} is the time slots arrival rate simply given by $R_{\text{slot}} = 1/T_{\text{slot}}$,

where T_{slot} is the time slot duration. Over the past few decades, tremendous progress has been made in increasing the PIE of optical links [13,14], with a key technology being low-noise high-quantum-efficiency photodetectors, such as superconducting nanowire single-photon detectors (SNSPDs) [15]. This has led to the first technology demonstration of deep-space optical communication using quantum detectors on Earth, namely, the Psyche Mission [16], which launched in October 2023. Figure 2 displays the PIE and DIE reported in several key laboratory experimental demonstrations [17–25], alongside theoretical limits, of the most prominent optical detection technologies that are capable of achieving a large PIE [19,26,27].

For systems limited solely by quantum noise, i.e., in the absence of excess noise, the Gordon-Holevo quantum capacity limit C_{GH} per unit of bandwidth B is given by [28–30]

$$C_{\text{GH}}/B = \log_2(1 + n_s) + n_s \log_2(1 + 1/n_s), \quad (2)$$

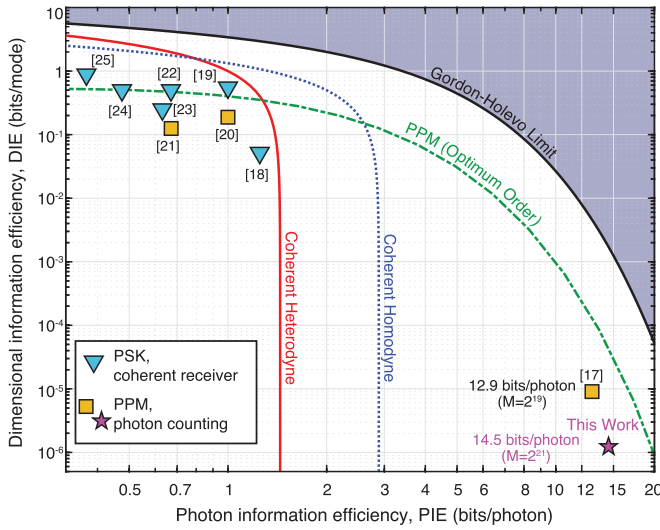


FIG. 2. Comparison of experimentally demonstrated PIEs and their associated DIEs, alongside theoretical capacities for photon counters (Gordon-Holevo), coherent homodyne and heterodyne, as well as for PPM with optimum modulation order and photon counters. The symbols display key experimental demonstrations cited in the references section of this paper. The highest PIE enables communication with the faintest received signal (M : order of PPM; PSK: Phase-Shift Keying).

where $n_s = P_s/(hf_cB) = F_s/B$, or the rate of arrival of photons per unit of signal bandwidth B [31]. Also displayed in Fig. 2 are the PIE limits of two forms of coherent detection, the conventional heterodyne and the ultimate homodyne [27] detection, whose capacities, C_e and C_o , respectively, are given by

$$C_e/B = \log_2(1 + n_s), \quad C_o/B = 1/2 \log_2(1 + 4n_s). \quad (3)$$

Coherent heterodyne detection reaches a DIE higher than that of homodyne detection at low PIE, while it is the opposite at high PIE. The heterodyne and homodyne PIE limits also correspond to the limits of an ideal phase-insensitive amplifier and phase-sensitive amplification, respectively [27,32,33]. A highly practical modulation technique to achieve high PIE using time-bin encoding is the Pulse-Position Modulation (PPM) format [12], where one pulse is positioned in a temporal frame composed of $M = 2^m$ time slots, where m is an integer and M is referred to as the PPM order. The expression for the capacity of PPM at an optimal order M is given by [34]

$$C_{\text{PPM}}^{\text{opt}} = \frac{[1 - \exp(-n_s)]^2}{M \log(2) T_{\text{slot}} [1 - (1 + n_s) \exp(-n_s)]}, \quad (4)$$

where $n_s = F_s \times MT_{\text{slot}}$ is the mean number of photons per PPM frame incident on the detector. It can be shown that in the absence of excess noise, a large value of M is necessary to achieve a high PIE [34]. The realization of a high PIE using a large M , however, places a stringent requirement on the transmitter extinction ratio (here ~ 80 dB and higher to minimally impact error rate), defined as the ratio of power in the time slot containing the data pulse to the average power per “empty” time slot. To maximize the data throughput, minimizing the time-slot duration (less than ~ 1 ns) is also desirable.

Developing an optical source that generates on-demand short pulses with a very high extinction ratio is an important challenge, especially when a low-complexity transmitter design is required, such as for downlink communication in deep-space exploration. In this paper, we report the experimental demonstration of a record PIE of 14.5 bits/photon using a large PPM order, $M = 2^{21}$. This is enabled using a highly compact transmitter, which is powered by a single 5-V USB cable connected to a laptop, that directly modulates a distributed feedback (DFB) laser to generate very high average extinction ratio (> 90 dB) short ($T_{\text{pulse}} \approx 50$ ps) optical pulses on demand.

II. EXPERIMENT

Figure 3 illustrates the experimental schematic. A computer-generated random bits sequence is segmented into bit strings of lengths $m = \log_2(M)$, each of which is mapped to a unique discrete temporal position of a pulse inside a PPM frame consisting of M time slots. The temporal width of each time slot is $T_{\text{slot}} \approx 400$ ps. An empty guard window of ≈ 100 ns (larger than the SNSPD’s dead time of ≈ 60 ns, and much shorter than the PPM frame duration ~ 0.1 – 1 ms) is inserted between consecutive PPM frames, resulting in a “guarded PPM frame” whose temporal duration is given as $T_{\text{frame}} = MT_{\text{slot}} + 100$ ns. The resulting digital signal is loaded onto a programmable arbitrary waveform generator (AWG) with a large dynamic memory, which triggers an optical pulse generator circuit (OPG; Highland Technologies T165 laser diode pulser) that directly modulates a DFB laser to produce optical pulses with a full-width at half-maximum (FWHM) temporal width of $T_{\text{pulse}} \approx 50$ ps. The OPG is only powered by a single 5-V USB cable. The resulting optical pulse sequence is fed into a series of calibrated variable optical attenuators (VOAs) that adjust the power to generate a weak coherent state (WCS) that is coupled into the detector via a fiber polarization controller that is tuned to maximize detector counts. The maximum channel loss at which communication is demonstrated in this experiment, for $M = 2^{21}$ and a mean number of photons incident on the detector per frame of $n_s = 0.02$, is 87.5 dB.

The detection setup consists of an electrically amplified cryogenic SNSPD connected to a time-tagging module (TTM). The SNSPD is biased to provide a good trade-off between dark counts and the system detection efficiency (SDE). A very small background count rate (< 1 Hz) was observed in the experiment. We denote the combined dark and background count rate as DBCR. The SDE and DBCR are experimentally measured to be $\eta_s = 0.815 \pm 0.01$ and $\text{DBCR} \approx 15$ Hz, respectively. A very-low-frequency (10 Hz) electrical clock is shared between the AWG and the TTM. The timestamps generated by the TTM are recorded via a computer interface and processed off-line to analyze system performance. The detected PPM sequence is recovered from the recorded timestamps by sorting them into temporal bins that are generated by interpolating the 10-Hz clock to the time-slot rate. For the purposes of error correction, a detected frame is considered a “valid” frame only if it contains exactly one count, i.e., if it lies within the transmitted PPM alphabet, and is compared with the corresponding transmitted frame and declared

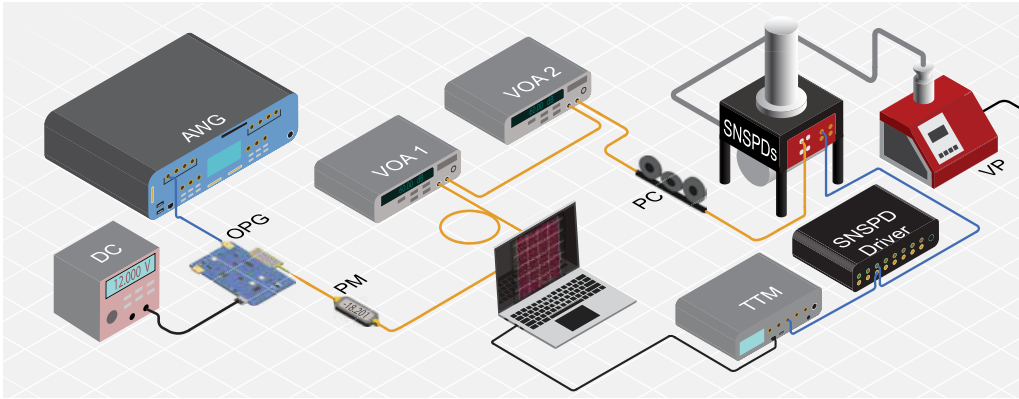


FIG. 3. Experimental schematic of a communication test bed employing a high extinction-ratio optical pulse generator (OPG) source to generate a WCS, using SNSPDs for detection. DC: direct current (power supply); PM: (inline) power meter; VP: vacuum pump.

either an errored or a correctly received frame. A detected frame is declared a “data frame erasure” if it contains either zero counts (an empty frame erasure) or two or more counts at different locations in the frame (a multiple-count frame erasure) due to dark/background count(s) or spurious counts from the finite-extinction-ratio pulse tails. The number of PPM frames recorded were $\approx 100\,000$, $71\,000$, and $35\,000$, respectively, for $M = 2^{19}$, 2^{20} , and 2^{21} , with 1000, 400, and 200, respectively, being distinct. The latter numbers were only limited by the AWG memory. The channel model is detailed in the Appendixes, where a detailed analysis of measured frame erasure and error ratios is also presented. The mean number of photons per frame incident on the detector, n_s , is calculated from the measured empty frame erasure ratio by inverting the Poisson probability for an empty frame detection. Finally, the measured frame erasure and error ratios are used to compute achievable information rates using Reed-Solomon (RS) forward-error correction (FEC) codes in which k information-carrying frames are encoded into an RS code of length $n = M - 1$. We compute the PIE under the assumption of bounded distance decoding, i.e., we assume correct decoding only if $\xi > e + 2t$, where ξ is the minimum code distance, and e and t are the number of errors and erasures, respectively. We compute the largest possible $k = k^*$ such that the RS code-word decoding error probability has an upper bound of 10^{-6} . The PIE is then given by $\text{PIE}(n_s) = k^* \log_2(M)/(n_s n)$. It was found that for the large code lengths chosen in this work, and for $n_s \gtrsim 0.1$, an RS code-word decoding error probability of 10^{-15} can be achieved at a PIE that is at most 2% smaller.

The average transmitter extinction ratio per time slot is defined as $ER_{\text{slot}} = (M - 1)R_s / (R_n - R_d)$ where R_s , R_n , and R_d are the signal, noise, and SNSPD dark/background count rates, respectively, where the noise rate includes all counts measured outside of the known transmitted time slot. The transmitter extinction ratio was measured to be $ER_{\text{slot}} \approx 90.8$ dB per slot. System behavior is assessed by comparing measured performance with a theoretical model based on the Poisson number distribution of the WCS, in which dark/background counts are assumed to have a mean Poisson rate equal to the experimentally measured DBCR, and the transmitted pulses are assumed to have an infinite extinction

ratio. In such a model, all frame errors and multiple-count frame erasures are caused by dark/background counts, referred to here as dark/background count limited (DBCL).

III. RESULTS

A. Record photon information efficiencies

Figure 4 displays the key result of this paper. The experimentally measured PIE is indicated in magenta data points with error bars. The dashed red curve depicts the maximum achievable mutual information rate per incident photon for a PPM channel with DBCL error and erasure probabilities (provided in the Appendixes), while the solid blue curve shows the PIE limit for such a channel upon employing RS coding. Both curves are computed for experimentally determined SDE and DBCR values, namely, $\eta_s = 0.815$ and $\text{DBCR} = 15$ Hz, allowing a direct comparison of achievable and measured PIEs. The error bars for the measured PIE and n_s shown in Fig. 4 indicate experimental uncertainty in the measured SDE and DBCR.

The experimentally demonstrated PIE shows excellent overlap with the theoretically computed PIE achievable with RS coding (solid blue curves), indicating that system performance is accurately described by an errors-plus-erasures channel model that employs RS coding, where the errors and erasures result solely from dark/background counts and channel attenuation. In other words, the high extinction ratio of our transmitter introduces very minimal additional errors. Interestingly, Fig. 4 indicates that for large n_s ($\gtrsim 0.6$), the performance approaches the errors-plus-erasures limit. This is explained as follows: for $n_s \rightarrow 0$, dark/background counts “contaminate” only empty received frames, leading to frame errors. For $n_s \gg 1$, dark/background counts result only in multiple-count frame erasures rather than errors, resembling an erasure-only channel. In general, the bounded minimum distance decoding employed here is suboptimal compared to maximum likelihood decoding. However, in the erasure-only channel, bounded distance decoding of RS codes provides optimal performance.

The maximum PIEs in Fig. 4 are seen around $n_s \sim 0.1$, corresponding to 14.03 ± 0.39 , 14.38 ± 0.39 , and 14.49 ± 0.44 bits per incident photon for PPM 2^{19} , 2^{20} , and 2^{21} ,

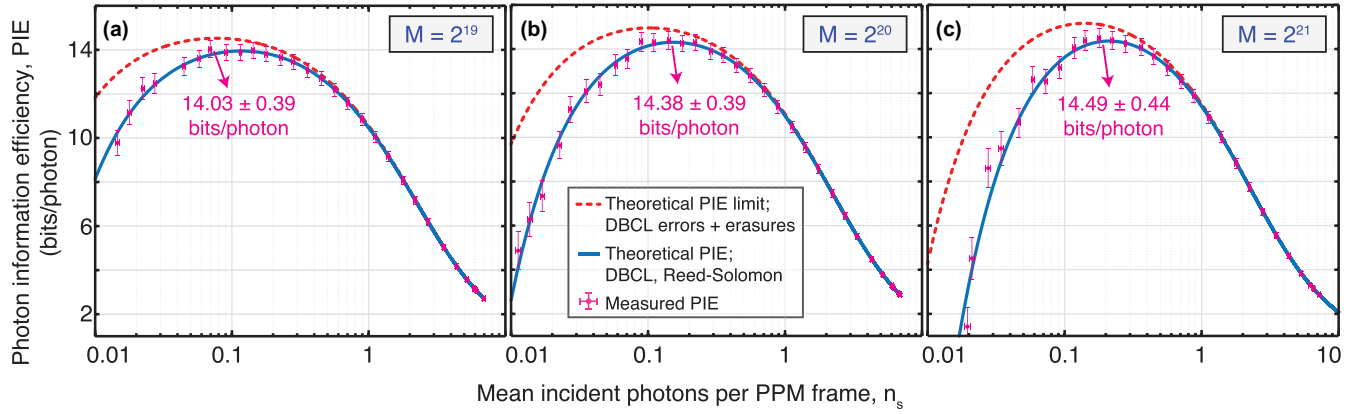


FIG. 4. Measured and theoretical dark-background-count-limited PIE vs mean incident photon number per PPM frame, n_s , for (a) $M = 2^{19}$, (b) $M = 2^{20}$, and (c) $M = 2^{21}$. Dashed red curve: maximum achievable mutual information rate per incident photon for theoretical DBCL frame error and erasure probabilities. Solid blue curve: PIE achievable for such a channel upon employing RS coding. Both theoretical curves assume a transmitter source that produces infinite extinction ratio optical pulses. Magenta data points: measured PIE and its uncertainty estimates. All curves shown are computed for experimentally determined SDE and DBCR ($\eta_s = 0.815$, DBCR = 15 Hz), allowing direct comparison of theoretical and measured PIEs.

respectively. When reported in terms of detected photons, they correspond to 17.21, 17.64, and 17.78 bits per detected photon, and the associated incident energy per bit values are 9.13, 8.91, and 8.84 zeptoJoules per bit. There exists a broad range of average incident power on the detectors (i.e., a broad range of channel loss at fixed transmitter power) for which a PIE of more than 10 bits/photon is achieved. To the best of our knowledge, these are the highest-ever demonstrated PIE numbers, or equivalently, the lowest energy ever detected at optical frequencies to receive one bit of information using a state of light compatible with high-loss channels.

B. Data rates

The experimentally demonstrated data rates also exhibit excellent agreement with the theoretical model, allowing a maximum data rate approaching 100 kbits/s for the PPM orders described here. Figure 5 depicts the measured and theoretical RS data rates, given by $D = k^* \log_2(M)/(nT_{\text{frame}})$.

Like the PIE, the measured data rate shows excellent agreement with the theoretically computed data rate for DBCL frame erasure and error probabilities and RS coding. For $n_s \lesssim 1$, the data rate exhibits a close-to-linear dependence on the average incident optical power, whereas for $n_s \gtrsim 1$, the data rate saturates and asymptotically reaches the limit of the PPM frame rate. Such a behavior is explained by the strong reduction in frame erasure ratio in the $n_s \gtrsim 1$ regime, described in Fig. 11. These results illustrate the large flexibility in data rate offered by the large- M platform over a very wide range of received optical powers.

IV. DISCUSSION

A. Transmitter architecture

The receiver employed in this work is similar to the one presented in a previous demonstration [17]. However, the transmitter architecture differs considerably. It consists of a

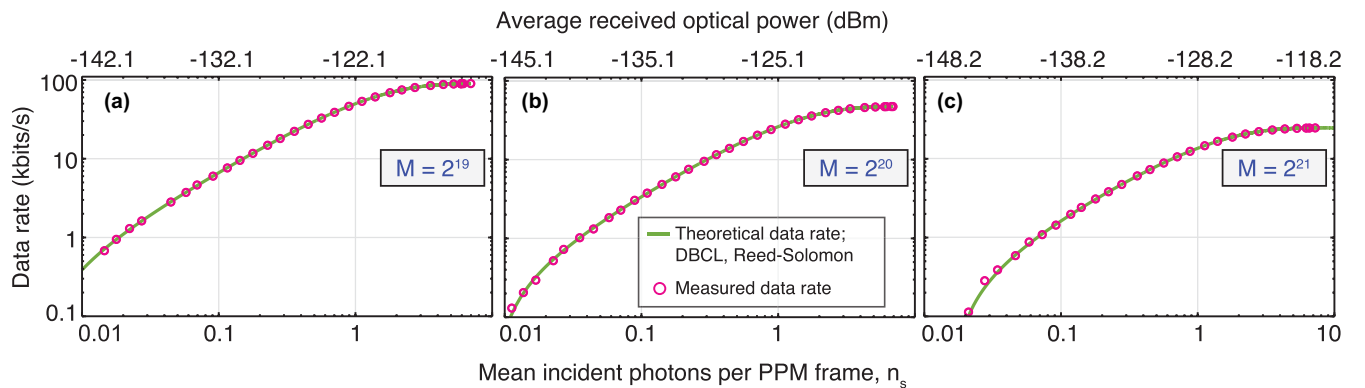


FIG. 5. Measured and theoretical data rate vs mean incident photon number per PPM frame, n_s , and average incident optical power (top axes), for (a) $M = 2^{19}$, (b) $M = 2^{20}$, and (c) $M = 2^{21}$. Solid green curve: theoretically computed data rate achievable for a PPM channel with DBCL error and erasure probabilities upon employing RS coding. Magenta circles: measured data rate. All curves shown are computed for experimentally determined SDE and DBCR ($\eta_s = 0.815$, DBCR = 15 Hz), allowing direct comparison of theoretical and measured data rates.

single directly modulated laser system, unlike the cascade of optical devices reported previously. Specifically, the OPG used here gain switches a DFB laser to produce short optical pulses with a high extinction ratio. Compared to the scheme used in [17], namely, a gain-switched semiconductor optical amplifier cascaded with a time-synchronized electro-optic modulator, the transmitter described here allows optical pulses one order of magnitude shorter in duration as well as a considerably better extinction ratio (improved by ≈ 15 dB) at $ER_{\text{slot}} \approx 90.8$ dB per slot. This dramatic improvement in pulse duration and extinction ratio allows us to use higher-order PPM than previously reported, which in turn enables simultaneously achieving larger data rates and record PIEs.

Additionally, our approach can enable a much more compact transmitter for deep-space missions that sidesteps the need for actively synchronizing multiple optical devices as in Ref. [17], and considerably simplify the electronic circuitry and device footprint.

B. Impact of background noise

In practical communication systems, such as in deep space, background radiation power can vary considerably depending upon the sources present, the wavelength band of interest for communication, the aperture size and location of the receiver, and the optical path traversed by the transmitted signal [35–38]. Several techniques exist for mitigation of background noise [12,36,39–41], a thorough review of which is beyond the scope of this paper. Here, we limit the scope of our experiments to the case of low background noise, which is relevant for transmitters in the vicinity of small celestial bodies with weak albedo, as well as in the scenario of no celestial bodies in the line of sight between transmitter and receiver. However, in Appendix H, we present a theoretical analysis of system behavior in the presence of large background noise. We discuss an adaptive modulation scheme that can be applied to optimize the downlink data rate when the transmitter transitions between low-DBCR and high-DBCR scenarios for the same received signal power.

C. Applications in quantum communication

Although the present work focuses on the use of time-bin-encoded WCS for communicating classical information through a high-loss channel, the experimental techniques presented in this work can be readily applied to realize quantum communication. It has been shown previously that the Bennett-Brassard (BB84) quantum key distribution (QKD) protocol implemented using WCS signal pulses is provably secure [42]. Indeed, due to the difficulty in realizing robust single-photon sources that can operate at large photon emission rates [43], time-bin-encoded WCS pulses have been employed in a number of key fiber-based and free-space QKD demonstrations [43–48].

Time synchronization between the transmitter (Alice) and receiver (Bob) is critical for the stable operation of a QKD system. This is most commonly realized using a separate classical channel. Recently, alternative methods to perform clock recovery from recorded timestamps have been demonstrated [49,50] that remove the requirement of the classical channel. We have shown in a separate work [50] that by utilizing a

high-extinction-ratio short pulse transmitter such as the one described in the present work, and by embedding a periodic optical pulse train in the transmitted time-bin-encoded signal, full clock recovery of a low- n_s received PPM signal can be realized via off-line analysis of recorded timestamps. In sum, these advances pave the way for future demonstrations of quantum communication protocols across vast distances and large path losses.

Finally, while we assume a single-Gaussian-beam transmitter throughout this paper, using spatially distributed emission from phased array transmitters may provide a path toward lowering path loss by adaptively shaping the far-field beam [51].

V. CONCLUSIONS

In conclusion, we experimentally demonstrated a record photon information efficiency of 14.5 bits per incident photon, or 8.84 zeptojoules per bit, at 1550 nm wavelength. This is achieved using a new low-complexity transmitter generating well-confined high-extinction-ratio short pulses on demand and a large PPM order. Such a high-PIE communication platform can enable bridging unprecedented path losses in power-constrained channels, in particular for deep-space exploration. We envision that the ability to extract information after severe attenuation can enable several other applications such as communication in turbulent media, increasing secrecy of transmission in fiber-based and free-space links, and improving the energy efficiency of conventional telecommunication networks.

ACKNOWLEDGMENTS

Author S.K.D. would like to thank Prof. Thomas E. Murphy (University of Maryland) for insightful discussions regarding the optical pulse generator used in this work.

DATA AVAILABILITY

The data that support the findings of this article are not publicly available because they contain commercially sensitive information. The data are available from the authors upon reasonable request.

APPENDIX A: PULSE-POSITION MODULATION SCHEME

Figure 6 depicts the PPM scheme employed in this experiment. A computer-generated random sequence of bits is converted into the PPM modulation format, in which exactly one time slot out of a set of $M = 2^m$ time slots (referred to here as the PPM frame) contains an optical pulse while all other time slots are empty. The number of bits mapped to each PPM frame is given by $m = \log_2(M)$. As shown for the example case of $M = 2^3$ in Fig. 6, each of the eight different possible bit strings of length $m = 3$ is mapped to a unique time slot number. A temporal 100-ns-long “guard window” is added between two consecutive PPM frames, to minimize the probability of detector blocking that may arise when two consecutive PPM frames contain optical pulses that are closer than the dead time of the detector, which, for our detectors, is ≈ 60 ns. The dead time is defined as the minimum time interval required between successive photon arrivals for

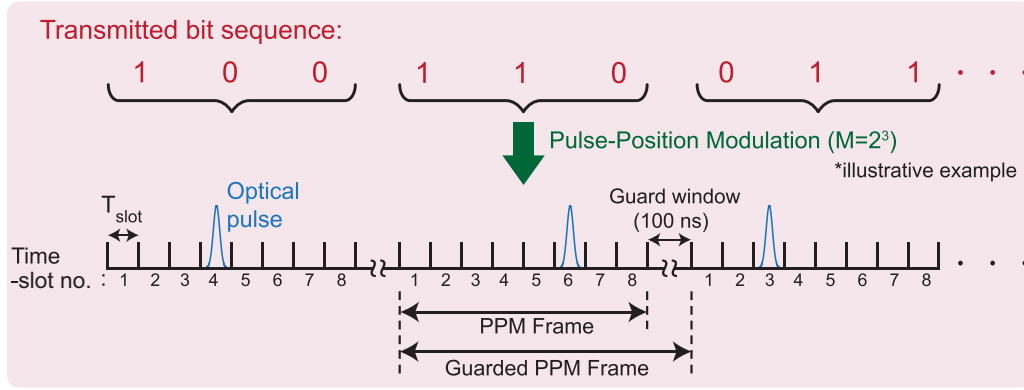


FIG. 6. Illustrative schematic depicting the pulse-position modulation (PPM) scheme employed in this work, for an example case of $M = 2^3$. A computer-generated bit sequence is segmented into bit strings of length $m = \log_2(M)$, and each unique bit string is mapped to a unique temporal position of an optical pulse in one out of M time slots. Consecutive PPM frames are separated by a guard window of 100 ns.

the detector to be able to detect both (up to the SDE). The combined time-domain symbol (i.e., PPM symbol + guard window) is referred to here as a “guarded PPM frame.” For the large values of M described in this work, the temporal duration of the PPM frame is much larger (by at least 4 orders of magnitude) than the guard window. As a result, the addition of the guard window results in negligible penalty to the PIE and the data rate.

We begin our discussion on detected frame classification by first noting that a “count,” throughout this paper, refers to a detection event in which an electrical pulse is generated by the SNSPD driver and tagged by the TTM. When the temporal separation between consecutive signal photons incident on the detector is larger than the detector dead time, it can result in up to one count per signal photon incidence. In such a scenario, the measured number of “counts” is completely determined by the number of incident photons and the detection efficiency η_s . However, when the temporal separation between consecutive incident signal photons is less than the detector dead time, the incidence of multiple photons on the detector still only results in up to one count, since the detector is inactive during the dead time following a detection event. This phenomenon is known as “detector blocking,” which will be discussed in further detail later in this paper. Note that detector blocking can also be caused by dark/background counts.

At the receiver, the detection of a PPM frame can result in the following three scenarios, as illustrated in Fig. 7: (1) an empty frame detection, (2) a detected frame with exactly one count, and (3) a detected frame with two or more counts. For the purposes of error-correction coding, the first and the third possibilities are declared to be data frame erasures since they fall outside of the alphabet of transmitted symbols. An “empty frame erasure” results when neither a dark or background count nor a photon from the transmitter is detected in the frame, whereas a “multiple-count frame erasure” occurs when two or more time slots contain counts, coming either from signal photons or dark/background noise. Two such examples are represented in Fig. 7. Finally, if a detected frame contains exactly one count, it is considered a valid frame, and is compared with the corresponding transmitted frame to assess frame error performance of the system.

Figure 8 illustrates the error and erasure channel diagram corresponding to the detection events described in Fig. 7. When the transmitted symbol is a PPM frame, there are four possibilities for the received symbol. As described above, the received PPM frame can be either empty or contain counts in multiple time slots, with probabilities denoted by $P_{\text{eras}}^{(0)}$ and $P_{\text{eras}}^{(2+)}$, respectively. Since both are outside of the transmitted PPM alphabet, they are classified for error-correction purposes as “data frame erasures.” The remaining two possibilities include the received PPM frame containing a count in exactly one time slot. Since the received symbol is part of the transmitted PPM alphabet, such frames are classified as valid frames. Valid frames are either errored or correctly received frames, with probabilities denoted by P_{err} and $1 - (P_{\text{eras}}^{(0)} + P_{\text{eras}}^{(2+)} + P_{\text{err}})$, respectively. The analytical expressions for the dark-background-count-limited frame erasure and error probabilities are described later, in Eqs. (E2) and (E3).

APPENDIX B: MEASUREMENT OF DETECTION EFFICIENCY AND DARK AND BACKGROUND COUNT RATE

The SNSPD used in the detection setup is biased using a constant electrical current, denoted as I_{bias} , such that it operates in the superconducting regime just below the threshold for transition to a resistive state. At such an operating point, the energy absorbed from a single photon is sufficient to break superconductivity for a short period of time (referred to as the detector dead time) and produce a rapid voltage change, resulting in a detection event [15]. The current I_{bias} is adjusted to provide a good trade-off between the generation of spontaneous thermal breaking of Cooper pairs within the SNSPD (dark counts) and the fraction of incident photons that are detected, namely, the system detection efficiency SDE, which we symbolically denote as η_s .

We measure the SDE and DBCR of the SNSPD by following the method presented in Refs. [52,53]. A continuous wave (CW) DFB laser operating at 1549.9 nm is attenuated using a benchtop variable optical attenuator (VOA) to ≈ -50 dBm. The output power is measured using a calibrated, high-accuracy and high-resolution benchtop optical power

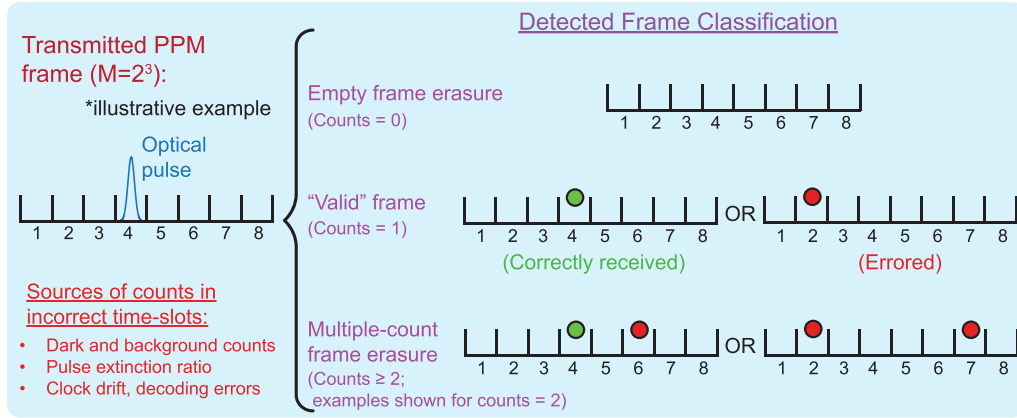


FIG. 7. Schematic illustrating possible detection events for an example case of $M = 2^3$. Detected frames that contain zero counts are declared as empty frame erasures, while frames with two or more counts are declared multiple-count frame erasures. If a detected frame contains exactly one count, it is considered a "valid" frame, and is compared with the corresponding transmitted frame to assess frame errors.

meter. A separately calibrated (second) benchtop VOA is used to further attenuate the CW beam to ≈ -111 dBm so as to produce a count rate around $\approx 60\,000$ counts per second on the detector. We then measure the number of detected photon counts over a long averaging time (60 s) for a range of SNSPD bias currents. The SDE is extracted by normalizing the mean number of measured counts per second to the input optical power measured beforehand (converted to a mean photon number at the laser wavelength).

In order for the SDE to be accurately measured as a simple ratio of the measured counts and average incident power, it is important to minimize the probability of detector blocking, i.e., one photon "blocking" the detection of a second photon that arrived within the dead time of the detector after the first one. This is done by choosing the order of magnitude for the measured count rate (in this case, $\approx 60\,000$ counts per second) such that the average interphoton arrival time (in this case, ≈ 20 μ s) is much larger than the dead time of the SNSPD, which was measured separately to be ≈ 60 ns, and which we define here as the minimum temporal spacing between con-

secutive photon arrivals for the detector to be able to detect both (up to the SDE).

Separately, we also measure the combined dark+background count rate, DBCR, as a function of SNSPD bias current I_{bias} . This is done by turning off the laser transmitter and averaging the counts measured over ≈ 60 s. The dark counts were measured by covering the input port of the SNSPD with a metallic cap, and the background counts were measured by connecting the fiber to the SNSPD input port, turning off the transmitter laser and carefully isolating the experimental setup from ambient light in the laboratory. No optical bandpass filters were used. The results of this characterization are shown in Fig. 9. The error bars depicted in the SDE plot are assessed by considering Poissonian standard deviation error in the measured count rates as well as a possible 0.1-dB error in the measurement of the calibration input optical power arising from disconnecting/reconnecting fiber optical connectors during the measurement.

This experiment was carefully performed multiple times in order to ensure repeatability of the measured SDE and

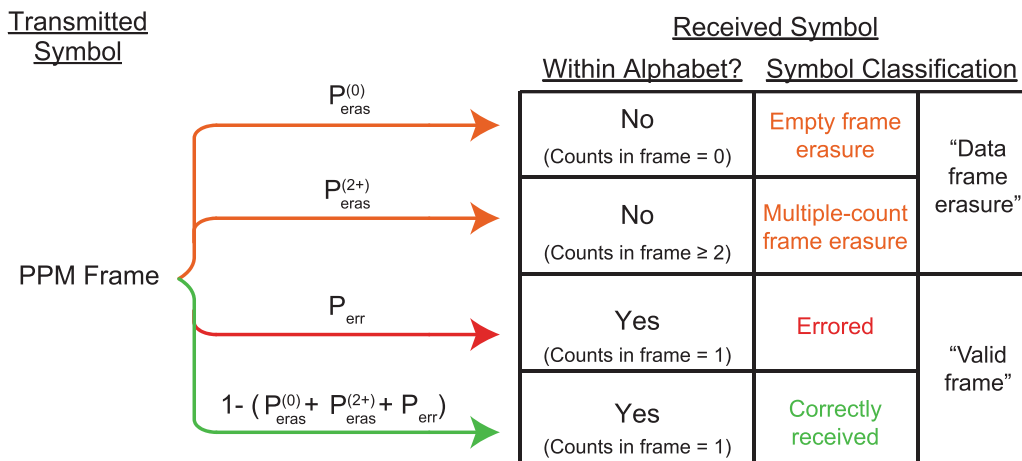


FIG. 8. Schematic depicting a PPM erasure channel diagram. Each detected PPM frame is categorized into one of four outcomes based on the number of counts measured in the frame.

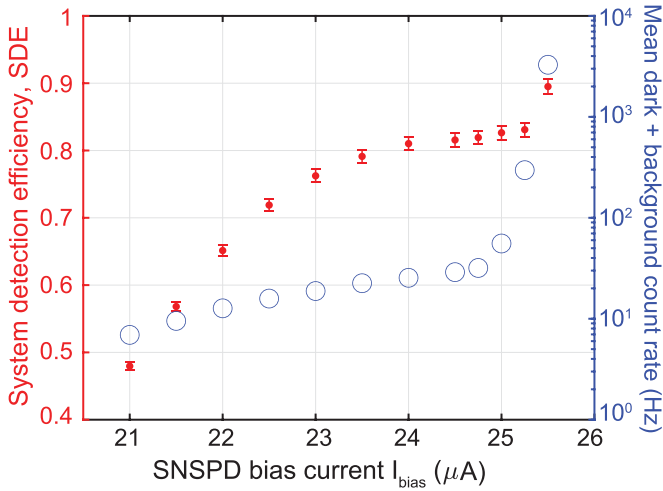


FIG. 9. Characterization of SNSPD: SDE and DBCR vs detector bias current. The error bars depicted correspond to one Poissonian distribution standard deviation in the measured count rates and an additional 0.1 dB error in the measured calibration optical power.

DBCR. The trends depicted in Fig. 9 agree with the SDE and DBCR vs bias current trends previously reported in the literature, such as in [53]. A bias current of $I_b \approx 24.5 \mu\text{A}$ was chosen for the PPM detection experiments as it provided a high SDE $\approx 0.815 \pm 0.01$ while maintaining a low mean DBCR of $\approx 15 \text{ Hz}$.

APPENDIX C: MEASUREMENT OF n_s

Having properly characterized the SNSPD as well as the transmitted optical pulse, we now move to measuring the mean number of photons incident on the detectors per PPM frame, n_s , which is critical to the accurate assessment of the photon information efficiency. To this end, we adopt a methodology similar to the one discussed in [17], namely, inverting the experimentally measured *empty* frame erasure probability. Modeling the system performance using Poisson statistics, the probability of detecting an empty frame is given by

$$P_{\text{eras}}^{(0)}(n_s) = e^{-\eta_s n_s - n_d}. \quad (\text{C1})$$

Experimentally, we measure the fraction of detected frames that are empty, denoted here as $F_{\text{eras}}^{(0)}$. In the presence of sufficient statistics in the experimental data, we set the left-hand side of Eq. (C1) equal to $F_{\text{eras}}^{(0)}$, and invert the expression to recover n_s :

$$n_s = \frac{-[\ln(F_{\text{eras}}^{(0)}) + n_d]}{\eta_s}, \quad (\text{C2})$$

where n_d is the DBCR normalized to the duration of one guarded PPM frame, and η_s is the SDE of the SNSPD.

We note that we also performed separate measurements, not described here, in which we estimated n_s by performing a careful measurement of the input average optical power using a highly sensitive optical power meter. Although the results of those measurements broadly agree with the n_s measured using the probability inversion method, the latter was observed to be more repeatable.

APPENDIX D: PULSE SHAPE AND EXTINCTION RATIO MEASUREMENTS

The transmitter employed in this work consists of a single directly modulated laser system, unlike the cascade of optical devices reported previously. Specifically, the OPG used here gain switches a DFB laser to produce short optical pulses with a high extinction ratio, which is necessary to achieve DBCR-limited performance. Here, we follow the definition of extinction ratio (ER) presented in [17]:

$$\text{ER} = \frac{R_s}{R_n - R_d}, \quad (\text{D1})$$

where R_s , R_n , and R_d are the measured signal, noise, and dark count rates, respectively. “Noise rate” R_n is defined as the fraction of detected photon counts that lie in all time slots other than the transmitted pulse time slot. This includes dark/background counts as well as spurious counts arising from any residual emissions from the transmitter outside of the transmitted time slot. We define the average extinction ratio per time slot as follows:

$$\text{ER}_{\text{slot}} = \frac{(M - 1)R_s}{R_n - R_d}, \quad (\text{D2})$$

where M is the total number of time slots in a PPM frame. The extinction ratio per slot provides a measure of how large of a PPM sequence a given pulsed optical transmitter can support. With a transmitter with a large ER_{slot} , one can support a large PPM order M without the empty time slots being corrupted, whereas a smaller ER_{slot} implies the presence of a larger number of photons outside of the desired time slots, which will ultimately hinder achieving high-photon-efficiency communication.

In order to experimentally characterize the ER of the optical pulse source, we first transmit a single PPM frame repeatedly, and reconstruct the shape of the optical pulse from the detected photon arrival timestamps measured over a long acquisition period. By overlaying successive detected frames, we reconstruct the temporal shape of the optical pulse, as shown in Fig. 10. The PPM order chosen for this measurement ensures that the temporal spacing between consecutive transmitted pulses was much larger than the detector dead time of 60 ns, thereby minimizing the probability of detector blocking.

As one can ascertain visually from Fig. 10, although the gain-switched optical pulse has a weak but observable tail, it is well confined within the $T_{\text{slot}} \approx 400 \text{ ps}$ PPM time slot. By measuring the total counts received inside and outside the transmitted time slots, the ER_{slot} is estimated. Specifically, by adjusting the mean incident photon number per frame n_s to be ≈ 0.1 over a long measurement period, we measure 31 746 counts in the transmitted time slot, and a total of 148 noise counts, of which 28 are assessed, based on arrival timestamps, to be arising from weak pulse tails outside of the transmitted time slot, which is expected to be the most significant contribution to noise counts from the transmitter. The resulting net extinction ratio, i.e., the ratio of power in the transmitted time slot to the power emitted by the transmitter in the remainder of the frame, is $\text{ER} \approx 30.5 \text{ dB}$. When normalized to one time

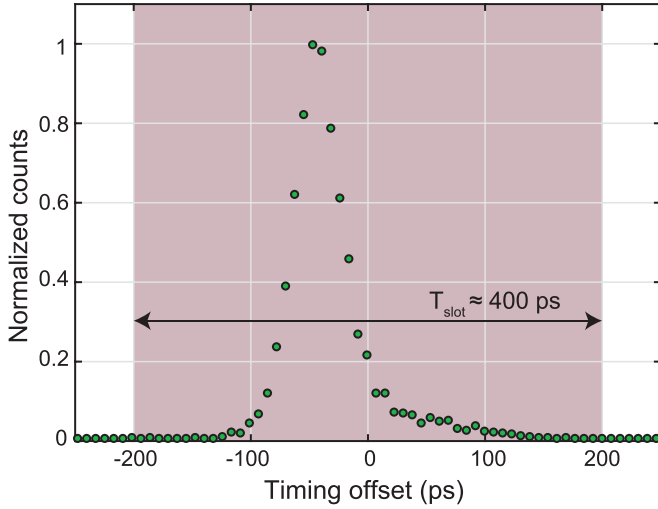


FIG. 10. Shape of the transmitted optical pulse reconstructed by overlaying arrival timestamps of photons detected in known time slots over a long acquisition time. The shaded portion represents $T_{\text{slot}} \approx 400$ ps, the duration of one PPM time slot. The optical pulse, generated by directly modulating a DFB laser, consists of weak tails that are confined well within this time slot, thereby providing a sufficient extinction ratio to achieve near dark-background-count-limited detection.

slot, for $M = 2^{20}$, this results in an average extinction ratio of $\text{ER}_{\text{slot}} \approx 90.8$ dB.

We note that the ER_{slot} achieved with the transmitter presented here is significantly better compared to the scheme described in [17]. This can be attributed to the fact that the directly modulated laser here is reverse biased throughout the empty time slots, whereas the scheme presented in [17] relies upon external modulation of a CW laser with a gain-switched semiconductor optical amplifier cascaded with a time-synchronized electro-optic modulator. The transmitter system described here not only provides a superior ER_{slot} , but it also is a more compact, simpler, and more energy-efficient system in comparison to cascaded external optical modulators, which makes such a source very practical, and ideal for deep-space missions that operate on a minimal supply of electrical power.

APPENDIX E: FRAME ERROR AND ERASURE RATES

In this section, we assess the accuracy of the theoretical statistical model in which system behavior is described by Poisson probabilities of the WCS and dark/background counts, by comparing the measured frame erasure and error rates to the theoretical DBCL probabilities.

As described in the Main Text and in Figs. 7 and 8, a detected frame is declared a data frame erasure if it is either empty (empty frame erasure) or contains two or more counts (multiple-count frame erasure). The latter occurs for either a combination of a dark/background and signal counts in the same frame or for multiple dark/background counts in the same frame. The theoretical DBCL data frame erasure probability is therefore given by

$$P_{\text{eras}}(n_s) = P_{\text{eras}}^{(0)}(n_s) + P_{\text{eras}}^{(2+)}(n_s). \quad (\text{E1})$$

Since all received frames with either zero or two or more counts are declared erasures, Eq. (E1) can be conveniently reexpressed as one minus the probability of receiving a frame with exactly one count. The probability of receiving such a valid frame for a detector dead time that is shorter than the frame duration but longer than the time slot duration may be rigorously derived by considering the convolution of a temporal signal incident on the receiver with the detector impulse response, and is beyond the scope of this paper. Here, we derive the phenomenological approximation of the erasure probability as follows:

$$P_{\text{eras}}(n_s) = 1 - \left(\underbrace{n_d e^{-(n_d + \eta_s n_s)}}_{\substack{1 \text{ dark/backg. count,} \\ 0 \text{ signal count}}} + \underbrace{(1 - e^{-\eta_s n_s}) e^{-n_d}}_{\substack{0 \text{ dark/backg. count,} \\ 1 \text{ signal count}}} \right) \times \left(\frac{M - \delta}{M} \right) - \left(\underbrace{n_d e^{-n_d}}_{\substack{1 \text{ dark/backg. count,} \\ \text{arb. signal counts}}} + \underbrace{(1 - e^{-\eta_s n_s})}_{\substack{1 \text{ signal count,} \\ \text{arb. dark/backg. counts}}} \right) \times \frac{\delta}{\frac{M}{\text{counts separation} < \delta}}, \quad (\text{E2})$$

where n_d is the DBCR normalized to the duration of one guarded PPM frame, δ is the number of time slots corresponding to the dead time of the SNSPD, and the sum of all terms inside the square brackets is the probability of receiving a frame with exactly one count. The first two highlighted terms inside the square brackets on the right-hand side of Eq. (E2) denote the Poisson probability of receiving either one signal count and zero dark/background counts per frame, or vice versa, respectively. The multiplicative factor $\frac{M - \delta}{M}$ denotes the fact that the two probabilities are computed for the case of counts separated by more than the detector dead time. The second group of highlighted terms account for the possibility of exactly one (either signal or dark/background) count in a frame being followed by any arbitrary number of either signal or dark/background incidences separated by less than the detector dead time, in which case the latter incidences do not result in counts due to detector blocking.

Finally, we note that the most general expression for the probability of producing one *signal* count in a frame is given by $1 - e^{-\eta_s n_s}$, i.e., one minus the Poisson probability of zero signal counts, and not by the Poisson probability of exactly one detected signal count $\eta_s n_s e^{-\eta_s n_s}$. This is because we model the transmitter to have an infinite extinction ratio, i.e., all signal photons incident on the detector are modeled to be confined to the same time slot. As a result, any value of n_s can only produce either zero or one count. This is in contrast with the dark/background counts, which are modeled to be temporally spread throughout the entire frame.

Similarly, the theoretical DBCL frame error probability is given by

$$P_{\text{err}}(n_s) = \left[n_d e^{-\eta_s n_s - n_d} \left(\frac{M - \delta}{M} \right) + n_d e^{-n_d} \frac{\delta}{M} \right] \left(\frac{M - 1}{M} \right), \quad (\text{E3})$$

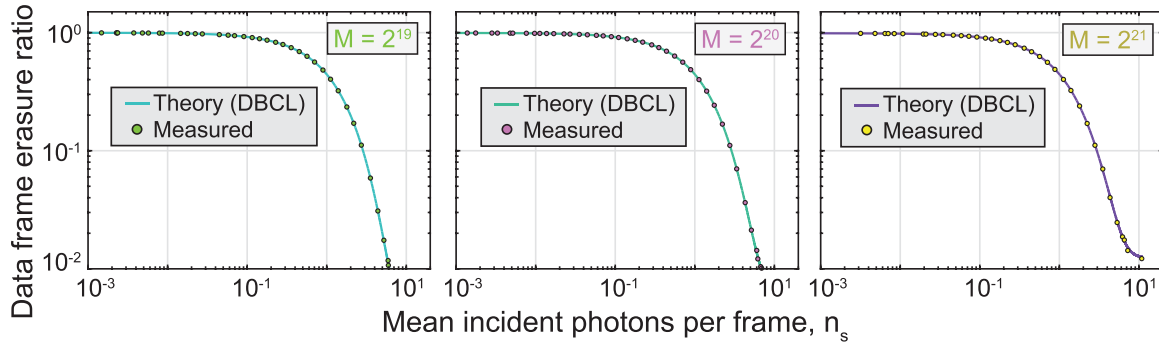


FIG. 11. Comparison of theoretical dark-background-count-limited (DBCL) and experimentally measured PPM frame erasure ratio, for PPM 2^{19} , 2^{20} , and 2^{21} with $T_{\text{slot}} \approx 400$ ps. The theoretical curves are plotted for a detection efficiency $\eta_s = 0.815$ and a dark/background count rate (DBCR) of 15 Hz.

where the first term denotes the probability of the absence of signal photons and the presence of exactly one dark count, and the second term indicates the fact that if a dark count were to occur approximately T_{DT} (i.e., the detector dead time) before a signal photon would arrive at the detector in the wrong time slot, then it would block the detection of the signal photon and result in a frame error. The multiplicative term $\frac{M-1}{M}$ accounts for the fact that a single-count frame results in an error only when the count is in the wrong time slot. Once again, the impact of δ in Eq. (E3) is very minimal ($\ll 0.01\%$) since $\delta \ll M$ in this work.

We now compare the probabilities described in Eqs. (E2) and (E3) to experimentally measured data frame erasure and frame error ratios. Figure 11 shows the comparison of data frame erasure ratios for PPM 2^{19} , 2^{20} , and 2^{21} . Excellent agreement is observed between theory and experiment. Figure 12 shows a comparison of measured frame error ratios, i.e., the fraction of *all* detected frames that are declared as errors. We once again note excellent agreement, indicating that system performance is accurately captured by the theoretical DBCL model in Eqs. (E2) and (E3). The close agreement of experimentally measured performance with a theoretical model in which the optical pulses are assumed to have an infinite extinction ratio indicates that the extinction ratio of the transmitter used is sufficiently high for the values of M chosen in this work.

The slight excess frame error ratio observed for $n_s \gtrsim 1$ in Fig. 12 can be attributed to the lack of sufficient frame error statistics at such high n_s . Minor contributions from the finite extinction of the pulse tails outside of the transmitted time slot may also be expected. Nonetheless, we note that these values of n_s are far separated from the regime of high-PIE operation that is the focus of the current work.

APPENDIX F: EXPERIMENTAL UNCERTAINTY ANALYSIS

1. Experimental uncertainty in n_s

The experimental uncertainty level on $n_s(\eta_s, n_d)$ can be estimated by performing error propagation analysis:

$$\left(\frac{\sigma_{n_s}}{n_s}\right)^2 = \left(\frac{\partial n_s}{\partial \eta_s}\right)^2 \sigma_{\eta_s}^2 + \left(\frac{\partial n_s}{\partial n_d}\right)^2 \sigma_{n_d}^2, \quad (\text{F1})$$

which, using Eq. (C2), is rewritten as

$$\left(\frac{\sigma_{n_s}}{n_s}\right)^2 = \left(\frac{\sigma_{\eta_s}}{\eta_s}\right)^2 + \left(\frac{\sigma_{n_d}}{\ln(F_{\text{empty}}) + n_d}\right)^2. \quad (\text{F2})$$

The temporal distribution of dark and background counts can be described by Poissonian statistics with a mean rate of n_d per frame. With “infinite” statistics (i.e., an “infinite” observation time), the measured mean (i.e., sample mean)

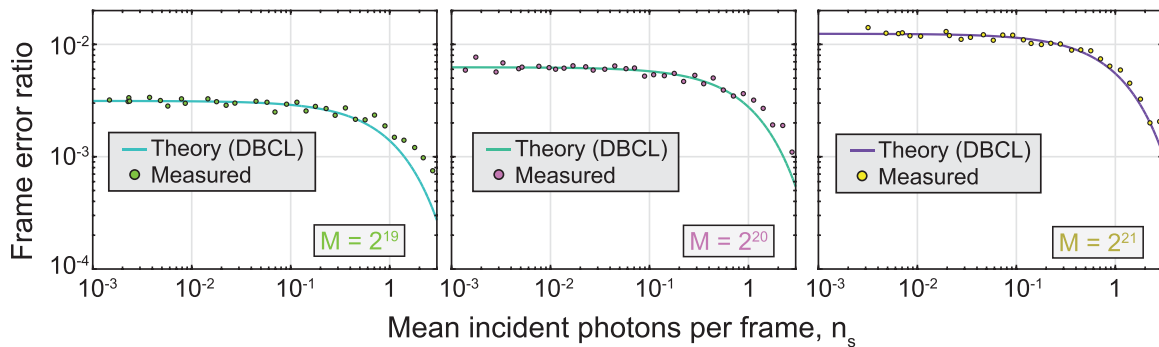


FIG. 12. Comparison of theoretical dark-background-count-limited (DBCL) and experimentally measured PPM frame error ratio, for PPM 2^{19} , 2^{20} , and 2^{21} with $T_{\text{slot}} \approx 400$ ps. The theoretical curves are plotted for a detection efficiency $\eta_s = 0.815$ and a dark count rate (DBCR) of 15 Hz. The slight deviation of experimental observation from DBCL performance for $n_s \gtrsim 1$ can be attributed to the lack of sufficient frame error statistics at such high n_s , with possible minor contributions from the finite extinction of the pulse tails outside of the transmitted time slot.

n_d converges to the true average number of dark counts per frame, say n_d^∞ , determined by the SNSPD's bias current as well as background counts, and $\sigma_{n_d}^2 = 0$. However, due to the finite duration of data acquisition, the sample mean n_d differs from the true statistical mean n_d^∞ , and the variance of sample mean is nonzero: $\sigma_{n_d}^2 \neq 0$.

For a sufficiently large sample size, the sample mean variance can be estimated by dividing the sample variance of the random variable by the number of samples. If N_f denotes the total number of PPM frames observed during an experiment, and if q is a discrete random variable that describes the number of dark counts observed in each PPM frame (i.e., q can take the values 0, 1, 2... for any given PPM frame), then the sample mean variance is given by

$$\sigma_{n_d}^2 = \frac{\sigma_q^2}{N_f}. \quad (\text{F3})$$

We estimate $\sigma_{n_d}^2$ by using this relation for the same dataset of dark/background counts recorded by the detector with no signal input that was used in Fig. 9. N_f is estimated as the total dark/background count acquisition time (i.e., ≈ 60 s) divided by the temporal duration of each frame T_{frame} , $N_f \approx 286\,000$.

2. Experimental uncertainty in PIE

The experimental uncertainty margins along the y axis of Fig. 4 are estimated by performing an error propagation analysis for the PIE. The PIE is given by the expression $\text{PIE} = k^* \log_2(M)/(n_s n)$, where, as described in the Main Text, k^*/n denotes the highest RS code rate for which the RS code-word error probability has an upper bound of 10^{-6} . The sources of uncertainty, in this case, are n_s and k^* . $\sigma_{n_s}^2$ is estimated as described above. The experimental uncertainty in k^* results from the finiteness of dark count statistics—and by extension the finiteness of frame error statistics—gathered during the experiment. In other words, because the measured sample mean number of dark counts per frame n_d has a nonzero variance as discussed above [see Eq. (F3)], so does the resulting frame error ratio. This, in turn, causes an uncertainty in the optimized RS code rate k^* .

The larger vertical (i.e., PIE) error bars for lower n_s values seen in Fig. 4 can be explained as follows. When the measured frame error ratio is primarily determined by dark counts (i.e., at very low n_s), the finite statistics of the sample mean variance $\sigma_{n_d}^2$ has a much greater contribution. For larger n_s , on the other hand, an increasing fraction of frame errors is caused by the finite extinction of the optical pulse (i.e., the pulse tails). Additionally, for larger n_s , the RS code rate k^*/n is higher, owing to lower empty frame erasures, leading to lower fractional uncertainty.

APPENDIX G: NUMERICAL MODELING OF A HYBRID-PPM DEEP-SPACE LINK

In order to further illustrate the suitability of a PPM-based transmitter for downlink deep-space optical communication, we theoretically analyze a “hybrid-PPM” scheme in which the transmitter employs a varying PPM order that maximizes the data rate at any given distance of the spacecraft from Earth. We assume a transmitter configuration that consists of a

TABLE I. Parameters for numerical simulation of hybrid-PPM scheme.

Parameter	Value
Power generated by solar panels at 3 A.U. from the Sun	2000 W
Solar panel power dependence on r_s	$1/r_s^2$
Transmitter wavelength	1550 nm
Transmitter electro-optic efficiency	0.2
Transmitter antenna diameter	0.22 m
Max. transmitter average optical power	4 W
DBCR at receiver	15 Hz
Receiver SDE	0.815
PPM slot width, T_{slot}	400 ps
Guard window between consecutive PPM frames	100 ns
Receiver (photon collection) antenna diameter	2.28 m

single-frequency laser directly modulated by an OPG, akin to the transmitter described in the Main Text, followed by a low-noise high-gain optical amplifier operating in the saturation regime that provides a fixed output average optical power. For simplicity, we model the transmitted optical pulses to have an infinite extinction ratio, which then lets us use Eqs. (E2) and (E3) from Appendix E in the Main Text to conveniently compute system performance.

We assume that the spacecraft, including its optical communication module, is powered by solar panels. We model the impact of the $1/r_s^2$ reduction, where r_s is the distance of the spacecraft from the Sun, in electrical power generated by the solar panels by proportionally dialing down the optical amplifier gain and maintaining a fixed electro-optic efficiency. The transmitted optical signal from the spacecraft to Earth exhibits its own inverse-squared attenuation, as it varies as $1/r_e^2$ where r_e is the distance from an Earth-based receiver. The total photon flux reaching the receiver is computed by assuming a fixed receiver “antenna” size of 2.28 m. Finally, we assume RS coding, the same as described in the Main Text.

In order to maximize the data rate at any given distance from an Earth-based receiver, such a transmitter would employ a lower PPM order when the spacecraft is close to the Earth and the Sun, where sufficient electrical power is generated by the solar panels and the mean number of photons per frame incident on the receiver, n_s , is sufficiently high. As the spacecraft ventures farther away from the Earth and the Sun, the transmitter switches to progressively higher PPM orders that are more photon efficient. Using this scheme, a single transmitter can achieve high data throughput close to Earth, and more importantly, maintain reasonable data rates even at very long distances from Earth thanks to the very high PIE offered by large PPM orders. The flexibility that is provided by such a transmitter in achieving a broad range of data rates and PIE was experimentally demonstrated by us recently in Ref. [54].

Table I summarizes the parameters used in this numerical study. The PPM slot width, guard window between consecutive PPM frames, receiver DBCR, and receiver SDE are all taken to be the same parameters employed in the Main Text. Several other parameters were chosen to match the system parameters in Psyche's optical communication demonstration [36] and other systems-level laboratory demonstrations [55]. The transmitter is assumed to operate at an output optical

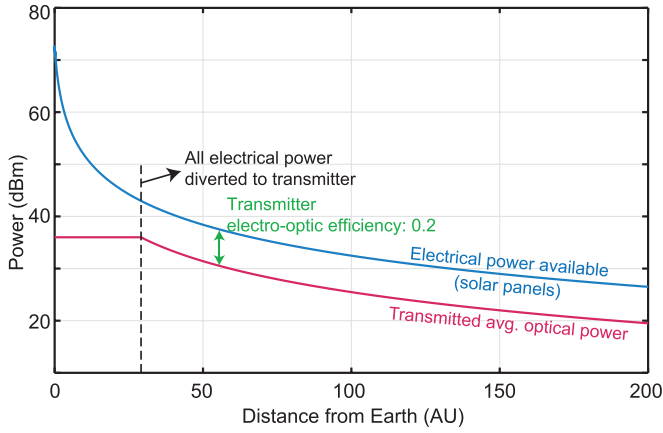


FIG. 13. Variation of electrical power generated by solar panels, and the resulting variation of output average optical power, with distance from Earth. A.U.: astronomical units.

average power of 4 W when sufficient power is available from the solar panels. The amplifier gain, and therefore the output average optical power, is proportionally reduced as the power generated by the solar panels reduces at farther distances. A fixed electro-optic efficiency (i.e., the efficiency of converting electrical to optical power) of 0.2 is assumed. The solar panel electrical power assumed here is similar to the power generated by Psyche’s solar panels [16].

Figure 13 depicts the variation of electrical power generated by the solar panels. Specifically, it exhibits a $1/r_s^2$ dependence, where r_s is the distance from the Sun. For the sake of uniformity, all quantities are plotted vs distance from Earth, where we make the simplifying assumption that the Sun, the Earth, and the spacecraft all lie in a straight line. The magenta line in Fig. 13 depicts the resulting variation in average optical power. The transmitter emits at a constant 4-W output power up to ≈ 29 A.U. from Earth, where the total electrical power generated by the solar panels equals the electrical power consumed by the 4-W transmitter. For distances beyond 29 A.U., we assume that the spacecraft temporarily shuts off power to all other instruments at the time of communicating with Earth so as to maximize data rate. We assume an optically amplified system operating in the saturation regime that outputs a constant average optical power for a given supplied electrical power.

Figure 14 (Top) shows the PIE of various logarithmic PPM orders [denoted by $m = \log_2(M)$] as a function of distance from Earth. The average optical power emitted by the transmitter is assumed to vary as depicted in Fig. 13. As expected, smaller m produces lower PIE closer to Earth, while larger m produces higher PIE at larger distances. Figure 14 (Bottom) shows the corresponding data rate offered by the various PPM orders. Closer to Earth, smaller m is favorable as it can enable high data rates approaching 100 Mbits/s for the parameters used here. By switching to progressively larger m as the distance from Earth increases, the data rate can be maximized at all distances by leveraging the higher PIE offered by larger m . Furthermore, larger m enables a longer range of communication, since for the same average optical

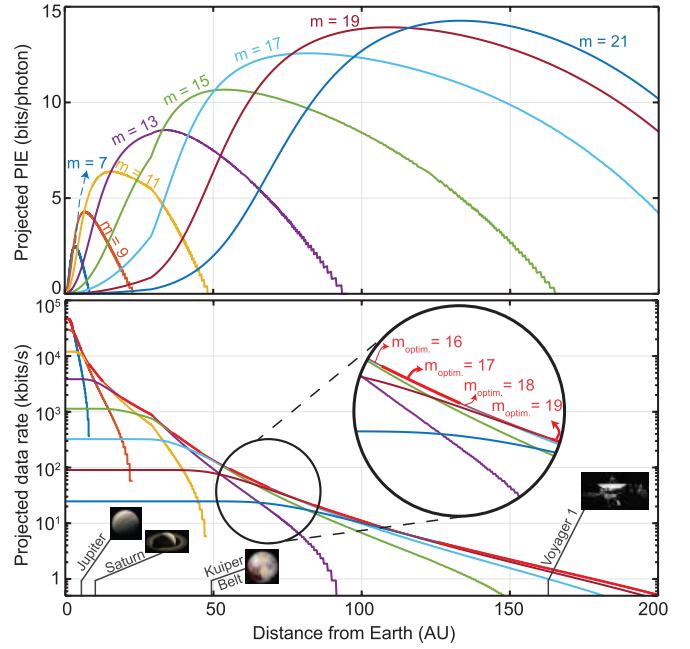


FIG. 14. Theoretical performance of a hybrid-PPM transmitter. Top: photon information efficiency of various PPM orders vs distance from Earth. Bottom: data rate offered by various PPM orders vs distance from Earth. The transmitter switches to progressively lower “optimal” PPM orders, denoted by m_{opt} , maximizing the data rate at all distances. The change in m_{opt} is graphically depicted by the alternating thicknesses in the red curve.

power at the transmitter, the energy per pulse is higher thanks to the lower repetition rate (i.e., frame rate).

The staircaselike features exhibited in the PIE and data rate plots arise from the fact that error-correcting codes, including the RS codes employed here, always have an *integer-valued* dimension k . For a given code length (which, here, is related to the PPM order $M = 2^m$ as $n = M - 1$), the optimal dimension k that maximizes data rate is constant over a range of attenuation (i.e., distance).

The projected data rate surpasses the ~ 10 Mbits/s goal for communication from Jupiter/Saturn laid out in Ref. [56]. Furthermore, for comparison with existing communication systems at much larger distances, NASA’s New Horizons spacecraft returned the now-iconic Pluto photograph (shown as an inset in Fig. 14) at a data rate of approximately 2 kbits/s [57]. At the same distance, the hybrid-PPM transmitter shows a projected data rate of ≈ 138 kbits/s, two orders of magnitude higher. Similarly, Voyager 1 currently operates at a data rate of 160 bits/s at the current distance of ≈ 163 A.U. At the same distance, the hybrid-PPM transmitter can offer a data rate of ≈ 1.5 kbits/s, an order of magnitude higher.

It must be emphasized that the results presented in this appendix are theoretical projections that do not take into account real-world conditions such as high DBCR arising from sky radiance and celestial noise sources, imperfect clock recovery, and pointing and coupling losses at the receiver. Additional losses are only expected to shift the curves in Fig. 14 to the left along the distance axis, while noise in the received data degrades system performance at any given spacecraft

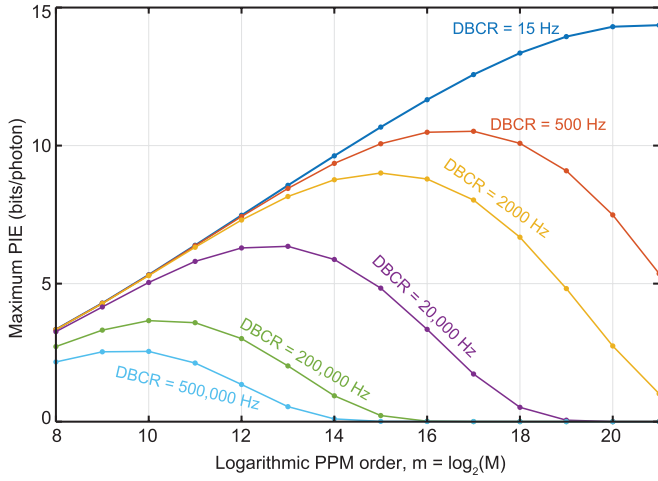


FIG. 15. Maximum attainable PIE vs logarithmic PPM order $m = \log_2(M)$, computed from theoretical frame erasure and error probabilities, over a range of DBCR values.

to Earth distance, as discussed in the following appendix. Nevertheless, Fig. 14 illustrates the flexibility afforded by the PPM modulation format over a vast range of distances, and the benefit of employing a large M to extend the span of the communication link.

APPENDIX H: SYSTEM PERFORMANCE AT HIGH DBCR

So far, we have focused our attention to the case in which dark/background noise power, specified as DBCR, is very low. In a real-life communication link, either in deep-space or in terrestrial applications, background radiation is expected to be higher than in the laboratory experiment discussed in this work. In the deep-space context, background noise from stray photons, emitted by other sources in the communication path such as planetary albedo, solar noise, sky radiance, etc., entering the receiver can result in a large DBCR [35–38]. A thorough review of background noise mitigation techniques is beyond the scope of this paper, but the theoretical formalism presented in this paper allows us to analyze system performance in the presence of large DBCR.

1. Performance limits

First, we use Eqs. (E2) and (E3) from Appendix E in the Main Text to compute theoretical frame erasure and error ratios over a large range of n_s (i.e., average optical power incident on the receiver), and calculate the maximum PIE attainable over that range of n_s when RS coding is employed. Such a computation is repeated for several values of DBCR. The time-slot duration, guard window duration, and SDE chosen for this study are shown in Table I.

Figure 15 shows the *maximum-attainable* PIE (i.e., maximum over all received powers n_s) versus logarithmic PPM order $m = \log_2(M)$. For DBCR = 15 Hz, the maximum-attainable PIE occurs at $m = 21$. This results from the fact that the signal count rate corresponding to the n_s of maximum PIE for $m \sim 20$ approaches the DBCR. As the DBCR

is increased, the performance of larger m degrades, owing to corruption of their larger-in-number empty time slots by background radiation, and the most photon-efficient order m for a given value of DBCR shifts to a lower value. If the DBCR were constant across a range of received powers, such as when the background counts are dominated by sky radiance, a smaller (larger) m offers better performance at larger (smaller) DBCR due to their larger (smaller) frame rate.

2. Performance of adaptive modulation for a fixed received power

Although the performance limits for different DBCRs, described as the maximum-attainable PIE over a range of n_s as shown in Fig. 15, is directly applicable to analyze scenarios such as large sky radiance, a more common scenario in a real-life downlink communication system involves a dynamically varying DBCR at a nearly constant transmitter-receiver distance. This can occur, for example, when the spacecraft flies by a planet or other celestial object of interest. In such a scenario, adaptive modulation is desirable to dynamically optimize the downlink data rate.

Here, we analyze how an adaptive modulation scheme would perform during a real-life mission in which the DBCR varies at a given transmitter-receiver distance (i.e., at a fixed received power). For the channel model discussed in this work, and for the transmitter and receiver parameters detailed in Table I, we choose four representative transmitter-receiver distances, and analyze PPM orders M that provide the highest data rate over a large range of DBCRs at each of those distances. The values of M considered in this analysis range from $M = 12$ to $M = 24$. For simplicity, we set the dead time of the detector to zero, and assume that the extinction ratio of the optical pulses produced by the transmitter is infinity, which allows us to use Eqs. (E2) and (E3) from Appendix E

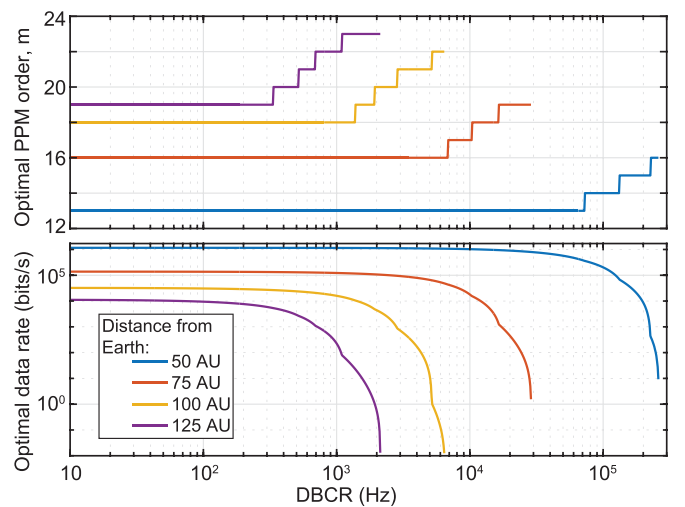


FIG. 16. Performance of adaptive PPM modulation at a fixed receiver power. Top: PPM order M that provides optimal (i.e., maximum) downlink data rate vs DBCR. Bottom: Corresponding optimal data rate. Both plots are shown for four representative transmitter-receiver distances (i.e., received powers).

in the Main Text to compute the frame erasure and error probabilities, which are then used to compute the RS data rate.

During a mission, the parameters of the dynamically varying channel, such as the channel loss and DBCR, may be estimated by various methods such as by monitoring the power and the FEC code rate, adaptive-threshold detection [58], and burst-mode detection [59]. Here, we consider the case for which the spacecraft transitions between regions of low and high DBCR at the same approximate distance from Earth. The transmitter is assumed to output a constant average power that does not depend on the modulation order M , i.e., it consists of an optical amplifier that operates in the saturation region. In other words, for a given average power output by the transmitter, pulses for a larger- M PPM signal contain proportionally higher energy compared to a smaller- M signal.

Figure 16 displays the computed optimal PPM order M (i.e., the order M that provides the highest downlink data rate) in the top plot, as well as the corresponding optimal data rate in the bottom plot, for four different fixed distances

from Earth. For any given distance, as the DBCR increases, switching to a larger order M provides the route to maintain an optimal data rate. This is seen as the upward-trending staircase pattern displayed by the plots in the top panel of Fig. 16. This results from the fact that for a given received average power, larger- M symbols contain more photons per signal pulse than smaller- M symbols, thereby improving the SNR of the received signal. For example, at a distance of 100 A. U. (other parameters are described in Table I), $M = 2^{18}$ provides the best data rate in a low-DBCR environment. At moderate DBCRs, say between 10^3 Hz and 6×10^3 Hz, progressively larger orders M enable maintaining communication due to the improved SNR of the received signal. As the DBCR increases further, however, the Reed-Solomon FEC fails to sufficiently correct the noise-induced frame errors and erasures for all orders M . In this regime, adaptive modulation can no longer maintain communication, and lowering the DBCR or improving the transmitted signal strength is necessary. Additionally, we observe that larger values of M ($\gtrsim 2^{20}$) perform better in the regime of long-range and low-to-moderate DBCR ($\lesssim 10^4$ Hz), consistent with Fig. 15.

-
- [1] J. Reingruber, J. Pahlberg, M. L. Woodruff, A. P. Sampath, G. L. Fain, and D. Holcman, Detection of single photons by toad and mouse rods, *Proc. Natl. Acad. Sci. USA* **110**, 19378 (2013).
 - [2] J. N. Tinsley, M. I. Molodtsov, R. Prevedel, D. Wartmann, J. Espigulé-Pons, M. Lauwers, and A. Vaziri, Direct detection of a single photon by humans, *Nat. Commun.* **7**, 12172 (2016).
 - [3] V. Ataie, D. Esman, B. P.-P. Kuo, N. Alic, and S. Radic, Subnoise detection of a fast random event, *Science* **350**, 1343 (2015).
 - [4] M. V. Jabir, N. F. R. Annafianto, I. A. Burenkov, A. Battou, and S. V. Polyakov, Energy and bandwidth efficiency optimization of quantum-enabled optical communication channels, *npj Quantum Inf.* **8**, 63 (2022).
 - [5] T. Zhong, H. Zhou, R. D. Horansky, C. Lee, V. B. Verma, A. E. Lita, A. Restelli, J. C. Bienfang, R. P. Mirin, T. Gerrits *et al.*, Photon-efficient quantum key distribution using time-energy entanglement with high-dimensional encoding, *New J. Phys.* **17**, 022002 (2015).
 - [6] M. Jachura, M. Jarzyna, M. Pawłowski, and K. Banaszek, Photon-efficient quantum key distribution using multiqubit time-bin encoding, in *International Conference on Space Optics (ICSO 2020)*, edited by B. Cugny, Z. Sodnik, and N. Karafolas (International Society for Optics and Photonics, SPIE, 2021), Vol. 11852, p. 118525J.
 - [7] R. S. Tucker, Green optical communications—part i: Energy limitations in transport, *IEEE J. Sel. Top. Quantum Electron.* **17**, 245 (2010).
 - [8] D. O. Caplan, Laser communication transmitter and receiver design, *J. Opt. Fiber Commun. Rep.* **4**, 225 (2007).
 - [9] D. K. Shin, Frequency and channel assignments, California Institute of Technology, 2015, <https://deepspace.jpl.nasa.gov/dsndocs/810-005/201/201F.pdf>.
 - [10] H. T. Friis, A note on a simple transmission formula, *Proc. IRE* **34**, 254 (1946).
 - [11] H. Kogelnik and T. Li, Laser beams and resonators, *Appl. Opt.* **5**, 1550 (1966).
 - [12] M. Jarzyna, L. Kunz, W. Zwoleński, M. Jachura, and K. Banaszek, Photon information efficiency limits in deep-space optical communications, *Opt. Eng.* **63**, 041209 (2024).
 - [13] R.-J. Essiambre, G. Kramer, P. J. Winzer, G. J. Foschini, and B. Goebel, Capacity limits of optical fiber networks, *J. Lightwave Technol.* **28**, 662 (2010).
 - [14] I. A. Burenkov, M. V. Jabir, and S. V. Polyakov, Practical quantum-enhanced receivers for classical communication, *AVS Quantum Sci.* **3**, 025301 (2021).
 - [15] L. You, Superconducting nanowire single-photon detectors for quantum information, *Nanophotonics* **9**, 2673 (2020).
 - [16] NASA, Nasa's psyche mission continues preparation for launch in 2023, 2023, <https://www.nasa.gov/image-feature/nasa-s-psyche-mission-continues-preparation-for-launch-in-2023>.
 - [17] W. H. Farr, J. M. Choi, and B. Moision, 13 bits per incident photon optical communications demonstration, in *Free-Space Laser Communication and Atmospheric Propagation XXV*, edited by H. Hemmati and D. M. Boroson (International Society for Optics and Photonics, San Francisco, CA, 2013), Vol. 8610, p. 861006.
 - [18] R. Kakarla, M. Mazur, J. Schröder, and P. A. Andrekson, Power efficient communications employing phase sensitive pre-amplified receiver, *IEEE Photon. Technol. Lett.* **34**, 3 (2022).
 - [19] R. Kakarla, J. Schröder, and P. A. Andrekson, One photon-per-bit receiver using near-noiseless phase-sensitive amplification, *Light: Sci. Appl.* **9**, 153 (2020).
 - [20] P. I. Hopman, P. W. Boettcher, L. M. Candell, J. B. Glettler, R. Shoup, and G. Zogbi, An end-to-end demonstration of a receiver array based free-space photon counting communications link, in *Free-Space Laser Communications VI*, edited by A. K. Majumdar and C. C. Davis (International Society for

- Optics and Photonics, San Diego, CA, 2006), Vol. 6304, p. 63040H.
- [21] M. E. Grein, A. J. Kerman, E. A. Dauler, M. M. Willis, B. Romkey, R. J. Molnar, B. S. Robinson, D. V. Murphy, and D. M. Boroson, An optical receiver for the Lunar Laser Communication Demonstration based on photon-counting superconducting nanowires, in *Advanced Photon Counting Techniques IX*, edited by M. A. Itzler and J. C. Campbell (International Society for Optics and Photonics, Baltimore, MD, 2015), Vol. 9492, p. 949208.
 - [22] M. L. Stevens, D. O. Caplan, B. S. Robinson, D. M. Boroson, and A. L. Kachelmeyer, Optical homodyne PSK demonstration of 1.5 photons per bit at 156 Mbps with rate- $\frac{1}{2}$ turbo coding, *Opt. Express* **16**, 10412 (2008).
 - [23] D. J. Geisler, V. Chandar, T. M. Yarnall, M. L. Stevens, and S. A. Hamilton, Multi-gigabit coherent communications using low-rate FEC to approach the Shannon capacity limit, in *2015 Conference on Lasers and Electro-Optics (CLEO)* (Optica Publishing Group, San Jose, CA, 2015), pp. 1–2.
 - [24] D. J. Geisler, T. M. Yarnall, W. E. Keicher, M. L. Stevens, A. M. Fletcher, R. R. Parenti, D. O. Caplan, and S. A. Hamilton, Demonstration of 2.1 photon-per-bit sensitivity for BPSK at 9.94-Gb/s with rate- $\frac{1}{2}$ FEC, in *2013 Optical Fiber Communication Conference and Exposition and the National Fiber Optic Engineers Conference (OFC/NFOEC)* (Optica Publishing Group, Anaheim, CA, 2013), pp. 1–3.
 - [25] X. Liu, S. Chandrasekhar, T. H. Wood, R. W. Tkach, E. C. Burrows, and P. J. Winzer, Demonstration of 2.7-PPB receiver sensitivity using PDM-QPSK with 4-PPM and unrepeated transmission over a single 370-km unamplified ultra-large-area fiber span, in *2011 37th European Conference and Exhibition on Optical Communication* (IEEE Xplore, Geneva, Switzerland, 2011), pp. 1–3.
 - [26] S. Dolinar, B. I. Erkmen, B. Moision, Kevin M. Birnbaum, and D. Divsalar, The ultimate limits of optical communication efficiency with photon-counting receivers, in *2012 IEEE International Symposium on Information Theory Proceedings* (IEEE, New York, 2012), pp. 541–545.
 - [27] K. Banaszek, L. Kunz, M. Jachura, and M. Jarzyna, Quantum limits in optical communications, *J. Lightwave Technol.* **38**, 2741 (2020).
 - [28] J. P. Gordon, Quantum effects in communications systems, *Proc. IRE* **50**, 1898 (1962).
 - [29] A. S. Holevo, The capacity of the quantum channel with general signal states, *IEEE Trans. Inf. Theory* **44**, 269 (1998).
 - [30] V. Giovannetti, R. García-Patrón, N. J. Cerf, and A. S. Holevo, Ultimate classical communication rates of quantum optical channels, *Nat. Photonics* **8**, 796 (2014).
 - [31] B. Moision and W. Farr, Range dependence of the optical communications channel, *Interplanet. Network Prog. Rep.* **42**, 199 (2014).
 - [32] Z. Tong, C. Lundström, P. A. Andrekson, C. J. McKinstrie, M. Karlsson, D. J. Blessing, E. Tipsuwannakul, B. J. Putnam, H. Toda, and L. Grüner-Nielsen, Towards ultrasensitive optical links enabled by low-noise phase-sensitive amplifiers, *Nat. Photonics* **5**, 430 (2011).
 - [33] P. A. Andrekson and M. Karlsson, Fiber-based phase-sensitive optical amplifiers and their applications, *Adv. Opt. Photonics* **12**, 367 (2020).
 - [34] S. Dolinar, K. M. Birnbaum, B. I. Erkmen, and B. Moision, On approaching the ultimate limits of photon-efficient and bandwidth-efficient optical communication, in *2011 International Conference on Space Optical Systems and Applications (ICSOS)* (IEEE Xplore, Santa Monica, CA, 2011), pp. 269–278.
 - [35] K. Shortt, D. Giggenbach, T. Dreischer, C. Luca, R. Daddato, A. Di Mira, and I. Zayer, Implications of sky radiance on deep-space optical communication links, in *65th International Astronautical Congress (IAC)* (International Astronautical Federation (IAF), Toronto, Canada, 2014).
 - [36] D. Rieländer, A. Di Mira, D. Alaluf, R. Daddato, S. Mejri, J. Piris, J. Alves, D. Antsos, A. Biswas, N. Karafolas, K.-J. Schulz, and C. Heese, ESA ground infrastructure for the NASA/JPL PSYCHE Deep-Space Optical Communication demonstration, in *International Conference on Space Optics (ICSO 2022)*, edited by K. Minoglou, N. Karafolas, and B. Cugny (International Society for Optics and Photonics, SPIE, 2023), Vol. 12777, p. 127770E.
 - [37] M. Mohageg *et al.*, The deep space quantum link: Prospective fundamental physics experiments using long-baseline quantum optics, *EPJ Quantum Technol.* **9**, 25 (2022).
 - [38] E. D. Aboagye and S.-P. Chen, Deep space optical communications (DSOC) downlink simulation with varying PPM order, *Opt. Quantum Electron.* **53**, 583 (2021).
 - [39] ESA, Noise rejection in optical communication systems using quantum pulse gating, 2023, <https://activities.esa.int/4000142484>.
 - [40] S. Lee, K. Wilson, and M. Troy, Background noise mitigation in deep-space optical communications using adaptive optics, *Interplanet. Network Prog. Rep.* **42**, 161 (2005).
 - [41] M. G. Raymer and K. Banaszek, Time-frequency optical filtering: efficiency vs. temporal-mode discrimination in incoherent and coherent implementations, *Opt. Express* **28**, 32819 (2020).
 - [42] H.-K. Lo and J. Preskill, Security of quantum key distribution using weak coherent states with nonrandom phases, *Quantum Inf. Comput.* **8**, 431 (2007).
 - [43] R. Bedington, J. M. Arrazola, and A. Ling, Progress in satellite quantum key distribution, *npj Quantum Inf.* **3**, 30 (2017).
 - [44] K. Sulimany, G. Pelc, R. Dudkiewicz, S. Korenblit, H. S. Eisenberg, Y. Bromberg, and M. Ben-Or, High-dimensional coherent one-way quantum key distribution, *npj Quantum Inf.* **11**, 16 (2025).
 - [45] B. Korzh, C. C. Wen Lim, R. Houlmann, N. Gisin, M. J. Li, D. Nolan, B. Sanguinetti, R. Thew, and H. Zbinden, Provably secure and practical quantum key distribution over 307 km of optical fibre, *Nat. Photonics* **9**, 163 (2015).
 - [46] A. Boaron, G. Boso, D. Rusca, C. Vulliez, C. Autebert, M. Caloz, M. Perrenoud, G. Gras, F. Bussi eres, M.-J. Li, D. Nolan, A. Martin, and H. Zbinden, Secure quantum key distribution over 421 km of optical fiber, *Phys. Rev. Lett.* **121**, 190502 (2018).
 - [47] F. Bouchard, D. England, P. J. Bustard, K. Heshami, and B. Sussman, Quantum communication with ultrafast time-bin qubits, *PRX Quantum* **3**, 010332 (2022).
 - [48] B. Da Lio, D. Bacco, D. Cozzolino, Y. Ding, K. Dalgaard, K. Rottwitt, and L. K. Oxenl owe, Experimental demonstration of the DPTS QKD protocol over a 170 km fiber link, *Appl. Phys. Lett.* **114**, 011101 (2019).

- [49] M. Zahidy, D. Ribezzo, R. Müller, J. Riebesehl, A. Zavatta, M. Galili, L. K. Oxenløwe, and A. D. Bacco, Single-photon-based clock analysis and recovery in quantum key distribution, *AVS Quantum Sci.* **5**, 041403 (2023).
- [50] C. Guo *et al.*, Record photon information efficiency with optical clock transmission and recovery of 12.5 bits/photon after 77 dB of optical path loss, in *2023 IEEE Photonics Conference (IPC), Orlando, FL, USA* (IEEE, Piscataway, NJ, 2023), pp. 1–2.
- [51] E. Bazzani, A. V. Guglielmi, R. Corvaja, N. Laurenti, F. Romanato, G. Ruffato, A. Vogliardi, G. Vallone, L. Vangelista, and P. Villoresi, High directional optical transmitter with phased array of nanoptical emitters and efficient error correction for long distance space communications, *Phys. Rev. Res.* **6**, 043266 (2024).
- [52] F. Marsili, V. B. Verma, J. A. Stern, S. Harrington, A. E. Lita, T. Gerrits, I. Vayshenker, B. Baek, M. D. Shaw, R. P. Mirin, and S. W. Nam, Detecting single infrared photons with 93% system efficiency, *Nat. Photonics* **7**, 210 (2013).
- [53] B. E. Vyhnaelek, S. A. Tedder, and J. M. Nappier, Performance and characterization of a modular superconducting nanowire single photon detector system for space-to-Earth optical communications links, in *Free-Space Laser Communication and Atmospheric Propagation XXX*, edited by I. H. Hemmati and D. M. Boroson (International Society for Optics and Photonics, San Francisco, CA, 2018), Vol. 10524, p. 1052419.
- [54] C. Guo, R.-J. Essiambre, S. K. Dacha, A. Blanco-Redondo, F. R. Kschischang, K. Banaszek, J. D. Sandoz, J. Cloonan, A. A. Sayem, and M. Vasilyev, Flexible data rate and power efficiency pulse-position-modulation communication with independent free-running clocks, in *2024 Conference on Lasers and Electro-Optics (CLEO)* (Optica Publishing Group, Charlotte, NC, 2024), No. SF3D.3, pp. 1–2.
- [55] J. M. Dailey, M. Dinu, R. Prego, J. Kolchmeyer, M. Berry, A. Monte, J. Engelberth, A. Maliakal, A. Piccirilli, J. LeGrange, R. Ahrens, T. Sochor, J. Jaques, and M. W. Wright, High output power laser transmitter for high-efficiency deep-space optical communications, in *Free-Space Laser Communications XXXI*, edited by H. Hemmati and D. M. Boroson (SPIE, San Francisco, CA, 2019), Vol. 10910, p. 109100M.
- [56] B. L. Edwards, D. Antsos, A. Biswas, L. E. Braatz, and B. Robinson, An envisioned future for space optical communications, in *International Conference on Space Optical Systems* (NASA Technical Reports Server (NTRS), Vancouver, Canada, 2023), NASA Document ID: 20230015296.
- [57] NASA, New horizons mission, 2024, <https://newhorizons.jhuapl.edu/Mission/Spacecraft.php>.
- [58] R. Mukai, P. Arabshahi, and T.-Y. Yan, An adaptive threshold detector and channel parameter estimator for deep space optical communications, in *IEEE Global Telecommunications Conference (GLOBECOM '01)* (Cat. No. 01CH37270) (IEEE Xplore, San Antonio, TX, 2021), Vol. 1, pp. 50–54.
- [59] H. G. Rao, C. E. DeVoe, A. S. Fletcher, I. D. Gaschits, F. Hakimi, S. A. Hamilton, N. D. Hardy, J. G. Ingwersen, R. D. Kaminsky, J. D. Moores, M. S. Scheinbart, and T. M. Yarnall, A burst-mode photon counting receiver with automatic channel estimation and bit rate detection, in *Free-Space Laser Communication and Atmospheric Propagation XXVIII*, edited by H. Hemmati and D. M. Boroson (International Society for Optics and Photonics, San Francisco, CA, 2016), Vol. 9739, p. 97390H.